



**SARAO**  
South African Radio  
Astronomy Observatory

---





<b>Organisation</b>	:	NRF (National Research Foundation)
<b>Facility</b>	:	SARAO (South African Radio Astronomy Observatory)
<b>Project</b>	:	HERA (Hydrogen Epoch of Reionization Array)
<b>Document Type</b>	:	PRD (Product Requirements Document)

---

## **PATCH PANEL REQUIREMENTS - HERA NODE**

Document Number..... H0050-1705-000  
Revision ..... 1  
Classification..... Commercial in Confidence  
Prepared by ..... K A Rosie  
Date ..... 2018-10-04

### DOCUMENT APPROVAL

	Name	Designation	Affiliation	Signature/Date
<b>Prepared by</b>	K Rosie	HERA Project Engineer	SARAO	 Kathryn Rosie (Oct 4, 2018)
<b>Reviewed by</b>	M Padayachee	Fibre Technician	SARAO	
<b>Reviewed by</b>	R Julie	Fibre Engineer	SARAO	 Roufurd Julie (Oct 4, 2018)
<b>Approved by</b>	Z Halday	HERA Project Manager	SARAO	 Ziyaad Halday (Oct 4, 2018)

### DOCUMENT HISTORY

Revision	Date of Issue	Prepared by	Comments (e.g. ECN Number or changes to document)
<b>A</b>	2018-06-22	K A Rosie	Released for comment
<b>B</b>	2018-09-25	K A Rosie	Updated after review
<b>1</b>	2018-10-04	K A Rosie	First issue

### DOCUMENT SOFTWARE

	Package	Version	Filename
<b>Word Processor</b>	MsWord	Word 2010	H0050-1705-000 Rev C Patch Panel Requirements - HERA Node.docx
<b>Block Diagrams</b>	Visio	Visio 2010	None
<b>Other</b>			None

### ORGANISATION DETAILS

Name	SARAO, Cape Town Office (Pinelands, Western Cape)	SARAO, Johannesburg Office (Rosebank, Gauteng)
<b>Registered Address</b>	3rd Floor, The Park, Park Road, Pinelands, 7405, South Africa	1st Floor, 17 Baker Street Rosebank, Gauteng 2196, South Africa
<b>Telephone</b>	+27 (0) 21 506 7300	+27 (0) 11 268 3400
<b>Fax.</b>	+27 (0) 21 506 7375	+27 (0) 11 442 2454
<b>Website</b>	www.sarao.ac.za	www.sarao.ac.za

## TABLE OF CONTENTS

<b>1</b>	<b>INTRODUCTION.....</b>	<b>6</b>
1.1	Background.....	6
1.2	Purpose.....	6
1.3	Identification .....	6
1.4	Node Patch Panel Description .....	6
1.4.1	Overview.....	6
1.4.2	Context Diagram.....	6
<b>2</b>	<b>REFERENCES .....</b>	<b>7</b>
2.1	Applicable Documents.....	7
2.2	Reference Documents .....	7
<b>3</b>	<b>PATCH PANEL REQUIREMENTS.....</b>	<b>7</b>
3.1	Panel Connectors.....	7
3.1.1	Panel Connector Type .....	7
3.1.2	Number of Connector Banks .....	7
3.2	Pigtails .....	7
3.2.1	Number of Pigtails .....	7
3.2.2	Fibre Type.....	7
3.2.3	Pigtail Connector Type .....	7
3.2.4	Pigtail Length .....	8
3.2.5	Pigtail Jacket .....	8
3.2.6	Pigtail Buffer .....	8
3.3	Splice Tray.....	8
3.4	Fibre Cable Interface .....	8
3.4.1	Fibre Cable Size.....	8
3.4.2	Fibre Cable Entry Direction.....	8
3.4.3	Cable Gland.....	8
3.5	Rack Interface.....	8
3.5.1	Rack-Mount Configuration .....	8
3.5.2	Rack Hardware .....	8
3.6	Patch Panel Construction .....	8
3.6.1	Patch Panel Height .....	8
3.6.2	Accessibility .....	8
3.6.3	Connector Port Direction .....	9

3.6.4	Patch Panel Material .....	9
3.6.5	Patch Panel Colour .....	9
3.7	Connector Performance .....	9
3.8	Connector End-Face Quality .....	9
<b>4</b>	<b>ENVIRONMENTAL REQUIREMENTS .....</b>	<b>9</b>
4.1.1	Temperature Cycling .....	9
4.1.2	Humidity .....	9
<b>5</b>	<b>DELIVERY REQUIREMENTS .....</b>	<b>9</b>
5.1	Packaging .....	9
5.2	Marking .....	9
5.3	Pigtail Ends .....	10
5.4	Cleanliness .....	10
5.5	Certificate of Conformance .....	10
5.6	Test Results .....	10
<b>6</b>	<b>QUALITY ASSURANCE .....</b>	<b>10</b>
6.1	Quality Management System .....	10
6.2	Inspection Equipment .....	10
<b>7</b>	<b>COMPLIANCE MATRIX .....</b>	<b>11</b>

## LIST OF FIGURES

Figure 1: Context Diagram for a Single HERA Node Patch Panel .....	6
--	---

## LIST OF TABLES

Table 1: Compliance Matrix .....	11
----------------------------------	----

## ABBREVIATIONS

HERA..... Hydrogen Epoch of Reionization Array  
 OEM..... Original Equipment Manufacturer  
 QMS..... Quality Management System  
 SARAO ..... South African Radio Astronomy Observatory

# 1 INTRODUCTION

## 1.1 BACKGROUND

The HERA telescope requires a patch panels in each of its shielded Node enclosures, distributed in the HERA array, to terminate fibre cables providing reticulated network access between the container and the Nodes.

## 1.2 PURPOSE

This document specifies the product performance, mechanical and environmental requirements for the patch panels required for the Node fibre terminations.

## 1.3 IDENTIFICATION

The patch panels are identified by the part number as **H0050-1705** in the HERA Product Breakdown Structure [RD1], and serially per item.

## 1.4 NODE PATCH PANEL DESCRIPTION

### 1.4.1 Overview

One Node patch panel is located in each of the HERA Nodes and provides termination for a fibre cable running between the HERA container and the relevant Node.

### 1.4.2 Context Diagram

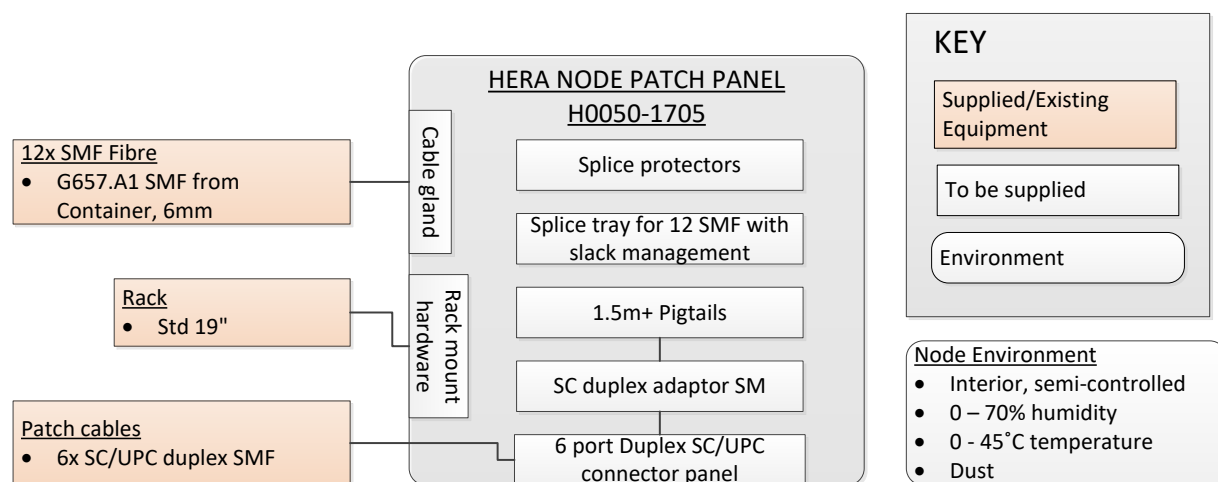


Figure 1: Context Diagram for a Single HERA Node Patch Panel

## 2 REFERENCES

### 2.1 APPLICABLE DOCUMENTS

The following documents are applicable to the extent stated herein. In the event of conflict between the contents of the applicable documents and this document, **the applicable documents** shall take precedence.

- [AD1] ITU-T G.657 (11/2016): Characteristics of a bending-loss insensitive single-mode optical fibre and cable.

### 2.2 REFERENCE DOCUMENTS

The following documents are referenced in this document. In the event of conflict between the contents of the referenced documents and this document, **this document** shall take precedence.

- [RD1] H0000-0000-001 HERA Product Breakdown Structure Rev C

## 3 PATCH PANEL REQUIREMENTS

[R1] The performance specifications as specified in this section shall be met or exceeded on delivery of the item to the client. The supplier shall ensure adequate margin for possible changes in performance during the stages of procurement, assembly, and transport.

### 3.1 PANEL CONNECTORS

#### 3.1.1 Panel Connector Type

[R2] The panel connector type shall be SC/UPC duplex.

#### 3.1.2 Number of Connectors

[R3] Each patch panel shall be populated with 6 duplex connector ports.

### 3.2 PIGTAILS

#### 3.2.1 Number of Pigtails

[R4] Each patch panel shall be populated with 12 pigtails of the type described herein.

#### 3.2.2 Fibre Type

[R5] The pigtails shall be made from single mode 9/125, G657.A1 compliant fibre.

#### 3.2.3 Pigtail Connector Type

[R6] Each pair of pigtail fibres shall terminate on the patch panel end with a duplex SC/UPC connector.

### 3.2.4 Pigtail Length

[R7] The length of each pigtail shall be no shorter than 1.5m and no longer than 2m.

### 3.2.5 Pigtail Jacket

[R8] The fibre jacket shall be of the Low Smoke Zero Halogen (LSZH) type.

### 3.2.6 Pigtail Buffer

[R9] Each pigtail shall have a 900µm semi-tight buffer.

## 3.3 SPLICE TRAY

[R10] The patch panel shall have a splice tray with slack management for 12 single mode fibres as described.

## 3.4 FIBRE CABLE INTERFACE

### 3.4.1 Fibre Cable Size

[R11] The patch panel shall allow for entry of one 6mm fibre cable.

### 3.4.2 Fibre Cable Entry Direction

[R12] The fibre cables shall enter the panel housing from the rear of the housing.

### 3.4.3 Cable Gland

[R13] The patch panel housing shall be supplied with a cable gland suitable for the specified fibre cable.

## 3.5 RACK INTERFACE

### 3.5.1 Rack-Mount Configuration

[R14] The patch panel shall mount to a standard 19-inch rack.

### 3.5.2 Rack Hardware

[R15] The patch panel shall be supplied with the requisite 19-inch mounting fasteners.

## 3.6 PATCH PANEL CONSTRUCTION

### 3.6.1 Patch Panel Height

[R16] The patch panel shall have a height of 1U.

### 3.6.2 Accessibility

[R17] The patch panel configuration shall allow access to connector ports without the need to unscrew panels or cover plates.



### 3.6.3 Connector Port Direction

[R18] Connector ports shall face towards the front of the rack mount unit.

### 3.6.4 Patch Panel Material

[R19] The patch panel enclosure material shall be metallic (e.g. aluminium).

### 3.6.5 Patch Panel Colour

No colour preference for the patch panel enclosure is specified.

## 3.7 CONNECTOR PERFORMANCE

### 3.7.1 Insertion Loss

[R20] The insertion loss of each connector shall not exceed 0.25dB at 1310nm and 1550nm.

### 3.7.2 Return Loss

[R21] The return loss of each connector shall be greater than 55dB at 1310nm and 1550nm.

## 3.8 CONNECTOR END-FACE QUALITY

[R22] Each connector end-face shall PASS the IEC 61300-3-35 standard for scratches and cleanliness.

## 4 ENVIRONMENTAL REQUIREMENTS

[R23] The patch panel components shall retain their optical and mechanical properties as described in this document in the case of exposure to the following environmental conditions.

### 4.1.1 Temperature Cycling

[R23.1] Transport and storage: -10 to +70 degrees Celsius

[R23.2] Installation: 0 to +50 degrees Celsius

[R23.3] Operation: 0 to +45 degrees Celsius

### 4.1.2 Humidity

[R23.4] All stages: 0 to 100%

## 5 DELIVERY REQUIREMENTS

### 5.1 PACKAGING

[R24] The patch panels shall be packed in such a way to prevent damage to the assembly during shipment and handling.

### 5.2 MARKING

No specific marking requirements are specified.

### 5.3 PIGTAIL ENDS

[R25] The pigtails shall be routed in the splice trays such that they are readily removable for splicing.

### 5.4 CLEANLINESS

[R26] All optical interfaces shall be clean, as specified in [R22], with dust caps inserted.

### 5.5 CERTIFICATE OF CONFORMANCE

[R27] Each patch panel shall be supplied with a certificate of conformance, stating the following at minimum:

[R27.1] The SARAO order number

[R27.2] The patch panel and all components have been checked and delivered according to the requirements of H0050-1705-000 (Rev #).

[R27.3] The connectors have been cleaned and inspected in accordance with [R26] of H0050-1705-000 (Rev #).

[R27.4] Name and signature of the responsible party.

### 5.6 TEST RESULTS

[R28] Each patch panel shall be supplied with insertion loss test results for each pigtail that forms part of the patch panel.

[R29] The results for the entire patch panel shall be compiled on a single A4 sheet and dated.

## 6 QUALITY ASSURANCE


### 6.1 QUALITY MANAGEMENT SYSTEM

[R30] The patch panel OEM shall be ISO9001 certified.

### 6.2 INSPECTION EQUIPMENT

[R31] The supplier shall have access to sufficient inspection equipment such that the parameters specified herein can be checked and recorded. The facilities may be audited by SARAO representatives to confirm suitability.

[R32] All test equipment used shall be within a valid calibration period.

	Patch Panel Requirements - HERA Node	Doc No:	H0050-1705-000
		Rev No:	1

## 7 COMPLIANCE MATRIX

Bidders are required to complete the following table and return it with their bid. *Comply / Intend to Comply / Non-compliance* shall be indicated in the relevant column and documentation which supports this needs to be provided. Please note that if no supporting documentation is provided for 'comply', the paragraph will be marked *Non-compliance*.

**Table 1: Compliance Matrix**

Req No.	Description	Comply / Intend to Comply / Non-compliance	Supporting Documentation
[R1]	Requirements for all stages		
[R2]	Panel connector type		
[R3]	Number of connectors		
[R4]	Number of pigtails		
[R5]	Fibre type		
[R6]	Pigtail connector type		
[R7]	Pigtail length		
[R8]	Pigtail jacket		
[R9]	Pigtail buffer		
[R10]	Splice tray		
[R11]	Fibre cable size		

Req No.	Description	Comply / Intend to Comply / Non-compliance	Supporting Documentation
[R12]	Fibre cable entry direction		
[R13]	Cable gland		
[R14]	Rack-mount configuration		
[R15]	Rack hardware		
[R16]	Patch panel height		
[R17]	Accessibility		
[R18]	Connector port direction		
[R19]	Patch panel material		
[R20]	Insertion Loss		
[R21]	Return Loss		
[R22]	Connector end-face quality		
[R23]	Environmental requirements		
[R24]	Packaging		
[R25]	Pigtail ends		
[R26]	Cleanliness		



Patch Panel Requirements - HERA Node

Doc No: H0050-1705-000

Rev No: 1

Req No.	Description	Comply / Intend to Comply / Non-compliance	Supporting Documentation
[R27]	Certificate of Conformance at delivery		
[R28]	Insertion loss test results		
[R29]	Compiled results		
[R30]	OEM QMS		
[R31]	Supplier access to equipment		
[R32]	Supplier test equipment calibration		













# H0050-1705-000 Rev 1 Patch Panel Requirements - HERA Node

Adobe Sign Document History

10/04/2018

Created:	10/04/2018
By:	Ziyaad Halday (zhalday@ska.ac.za)
Status:	Signed
Transaction ID:	CBJCHBCAABAAKTqbVeS5kOf5RdIU5nPyJiYJ1AA4R-8v

## "H0050-1705-000 Rev 1 Patch Panel Requirements - HERA Node" History


-  Document created by Ziyaad Halday (zhalday@ska.ac.za)  
10/04/2018 - 6:27:13 AM PDT - IP address: 196.24.39.242
-  Document emailed to Ziyaad Halday (zhalday@ska.ac.za) for signature  
10/04/2018 - 6:29:16 AM PDT
-  Document emailed to Kathryn Rosie (krosie@ska.ac.za) for signature  
10/04/2018 - 6:29:16 AM PDT
-  Document emailed to Manny Padayachee (manny@ska.ac.za) for signature  
10/04/2018 - 6:29:17 AM PDT
-  Document emailed to Roufurd Julie (rjulie@ska.ac.za) for signature  
10/04/2018 - 6:29:17 AM PDT
-  Document e-signed by Ziyaad Halday (zhalday@ska.ac.za)  
Signature Date: 10/04/2018 - 6:29:45 AM PDT - Time Source: server- IP address: 196.24.39.242
-  Document viewed by Manny Padayachee (manny@ska.ac.za)  
10/04/2018 - 6:29:53 AM PDT - IP address: 66.249.93.205
-  Document viewed by Kathryn Rosie (krosie@ska.ac.za)  
10/04/2018 - 6:35:42 AM PDT - IP address: 66.249.93.204
-  Document e-signed by Manny Padayachee (manny@ska.ac.za)  
Signature Date: 10/04/2018 - 6:36:04 AM PDT - Time Source: server- IP address: 196.24.39.242
-  Document e-signed by Kathryn Rosie (krosie@ska.ac.za)  
Signature Date: 10/04/2018 - 6:38:55 AM PDT - Time Source: server- IP address: 196.24.39.242

 Document viewed by Roufurd Julie (rjulie@ska.ac.za)

10/04/2018 - 6:39:19 AM PDT- IP address: 66.249.93.205

 Document e-signed by Roufurd Julie (rjulie@ska.ac.za)

Signature Date: 10/04/2018 - 6:42:13 AM PDT - Time Source: server- IP address: 196.24.39.242

 Signed document emailed to Ziyaad Halday (zhalday@ska.ac.za), Kathryn Rosie (krosie@ska.ac.za), Roufurd Julie (rjulie@ska.ac.za), and Manny Padayachee (manny@ska.ac.za)

10/04/2018 - 6:42:13 AM PDT